



CMM laser scanning



3D LASER SCANNER LC15Dx



LC15Dx laser scanner

Manufacturers gain a better appreciation of the dimensional quality of their products without compromising on cycle times. A wider variety of parts, geometry and materials can be measured more effectively, including many parts too small or fragile for a touch probe.

BENEFITS

Closing the accuracy gap

An LC15Dx is a viable alternative to a tactile probe for high precision CMM applications. The smallest part details can be captured with best-in-class accuracy. Thanks to solid state laser scanner technology and an innovative calibration method, the LC15Dx is closing the gap between laser scanning and tactile probing, achieving accuracies to within microns. Unlike a tactile probe, however, the scanner uses non-contact 3D laser triangulation to measure the surface directly and eliminate probe compensation errors. Full thermal compensation means the maximum accuracy is achieved as soon as the scanner is powered on.

Versatile scanning without the hassle

Nikon's unique ESP3 technology intelligently adapts the laser settings for each measured point in real time. A wider range and mix of surface materials, finishes, colors and transitions can be measured more efficiently without user interaction, manual tuning and part spraying, including small and fragile parts. Unwanted reflections are neutralized by an advanced software filter while changes in ambient light are absorbed by a high-grade daylight filter.

Better appreciation of product quality

The entire part is checked to the CAD model and any areas of concern can immediately be highlighted on a color map, thus providing a complete 3D visualization of dimensional quality. Further investigation and analysis is possible using fly-outs, sections and a library of Geometric Dimensioning and Tolerancing (GD&T). Inspection reports can be as simple or complex as required with follow-on reports fully automated.



Closing the gap with tactile probe accuracy

AUTOJOINT CONNECTION

Automatic and repeatable probe change

ESP3

Automatic laser settings

THERMAL STABILIZER

Zero warm-up

REFLECTION FILTER

Neutralizes unwanted reflections

DAYLIGHT FILTER

Absorbs ambient light

FULLY INTEGRATED

Laser signal routed via probe interface

STATUS LEDs

Laser diagnostics and status

RANGE FINDER

User guide for manual operation

HIGH QUALITY NIKON LENS

Improves accuracy and data quality

EYE SAFE LASER

Class 2 visible light laser

FEATURE INSPECTION

Feature measurement and GD&T analysis

SECTIONS AND PROFILES

2D section and profile analysis

DIGITAL COPY

Inspection on digital copy of actual part

MULTI-SENSOR

Combine measurements from different sensor types

COLOR MAP

Easy interpretation of measurement results


CAD PROGRAMMING

Simple programming of measurement and analysis routines


SOFTWARE

Intuitive software for every application


A selection of popular software packages for measurement, analysis and reporting is available for the LC15Dx, including Nikon Metrology's own FOCUS software.

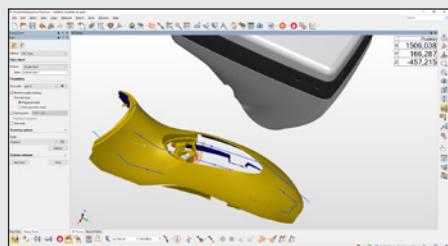


Intuitive programming and offline simulation reduce preparation time

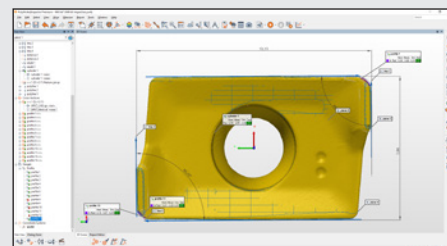


Fast and easy inspection of geometric dimensions

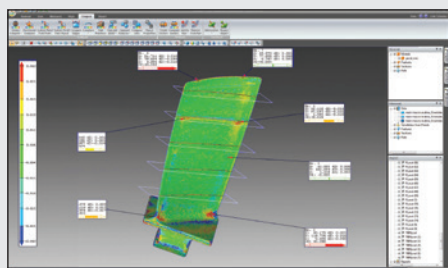

Blade section analysis combined with full 3D comparison

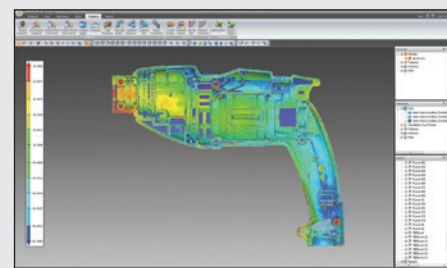

3D visualization of dimensional quality

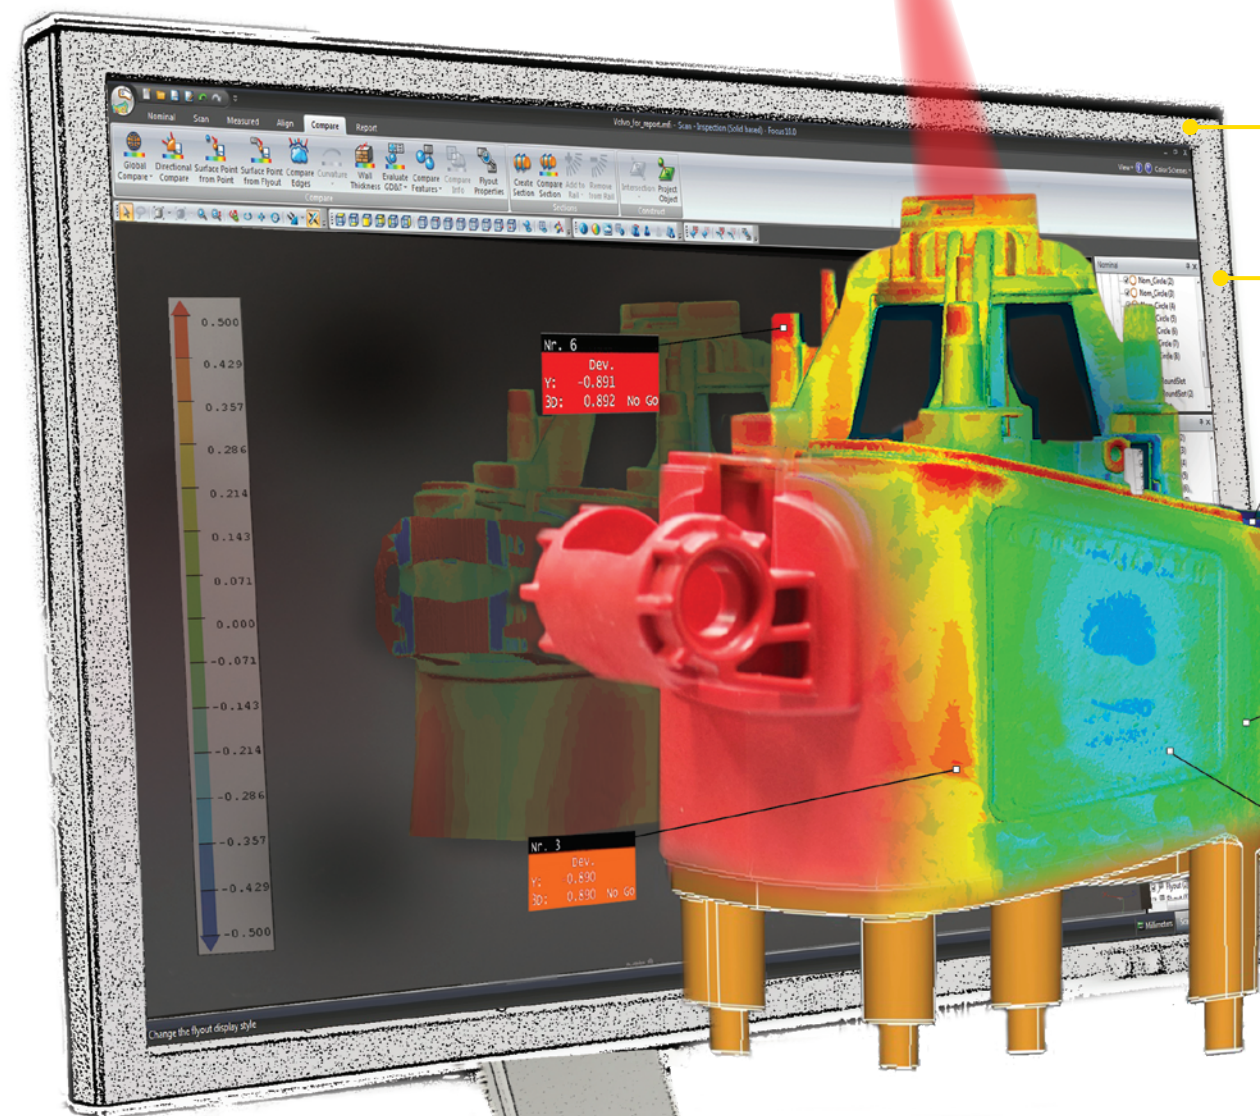

Multi-sensor applications

COMBINE LASER SCANNING WITH A TACTILE PROBE

In some cases a single sensor technology is insufficient for measuring all of the features. The LC15Dx can be combined with an optional tactile probe to create a versatile multi-sensor CMM.

Depending on the application both technologies can be used individually or sequentially in the same inspection program. Fully automatic sensor changing is possible with the addition of an optional change and storage rack mounted on the table of the CMM.



HIGH PRECISION PARTS AND SMALL GEOMETRY


The LC15Dx provides significant benefits for a wide variety of high precision parts and geometry, including those with small details, semi-rigid parts and components made from demanding materials.



Precision molding
Measure small, soft and fragile parts



Medical implants
Inspect complex freeform geometry

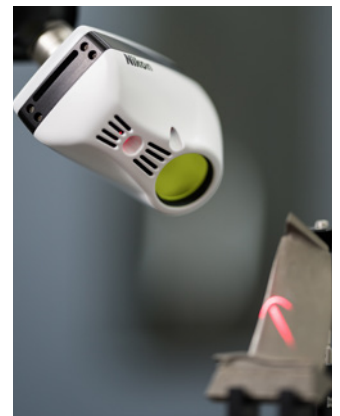

Turbine blades
Eliminate probe tip compensation errors

ENHANCE THE CAPABILITY OF YOUR CURRENT CMM

Retrofitting your current CMM with an LC15Dx is a cost-effective solution. The scanner integrates with the existing CMM controller hardware and compatible probe system to provide a versatile, multi-sensor CMM offering both non-contact and touch probe inspection.

LC15Dx retrofit kits are available for the most common CMM controller systems. Contact Nikon for details on exact versions of the controllers.

Specifications

Probing error (MPE _p) ¹	1.9 µm (0.000075")
Ball bar length (MPE _E) ²	A+4 µm +L/350 mm (A+0.00016 +L/13.78")
Multi-stylus test (MPE _{AL}) ³	3.9 µm (0.00015")
ISO Probing form error ⁴	7 µm (0.00027")
ISO Probing size error all ⁵	10 µm (0.000591")
ISO Probing dispersion value ⁶	7.6 µm (0.000299")
ISO Cone angle ⁷	125°
Scanning speed (approx.)	70,000 points/sec
Resolution (point spacing)	22 µm (0.00087")
Points per line (approx.)	900
Measuring temperature range	18-22°C (64.4-71.6° F)
Operating temperature range	10-40°C (50-104° F)
Weight	370 g (0.82 lbs)
Ingress protection	IP30
Laser safety	Class 2
Enhanced Scanner Performance	ESP3
Daylight filter	Yes
Connector type	Renishaw Autojoint

All accuracy specifications valid for a CMM with an accuracy of 2µm + L/350 or better using manufacturer supplied test sphere

¹ Nikon Metrology test comparable to EN/ISO 10360-2 MPE_p using 1σ sphere fit.

² Nikon Metrology test comparable to EN/ISO 10360-2 MPE_E where A is equal to the CMM MPE first term value.

³ Nikon Metrology test comparable to EN/ISO 10360-5 MPE_{AL}


Accuracy specifications according to ISO 10360-8:2013:

⁴ P_{Form.Sph.1x25-Tr-ODS,MPE} : "Maximum probing form error" using 25 representative points in translatory scanning mode

⁵ P_{Size.Sph.All-Tr-ODS,MPE} : "Maximum probing size error using All" measured points in translatory scanning mode

⁶ P_{Form.Sph.D95%-Tr-ODS,MPL} : "Maximum probing dispersion value" using 95% of the measured points in translatory scanning mode

⁷ Cone angle : Region of sphere on which the measured points are selected

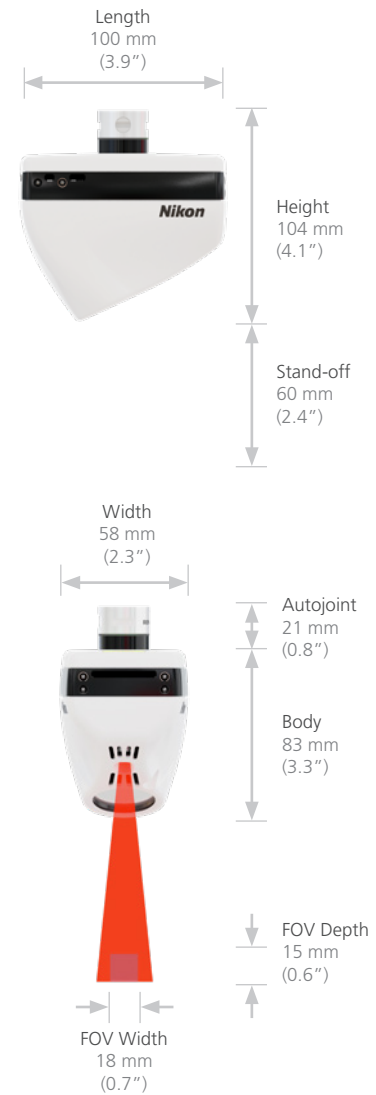

LASER RADIATION
DO NOT STARE INTO THE BEAM
CLASS 2 LASER PRODUCT
Max output = 4.9 mW 660 nm
1.0 mW 635 nm
IEC 60825-1 Edition 3.0 2014
Read instruction manual before use

Complies with 21 CFR 1040.10 and 1040.11, Laser Notice No. 56 dated May 8, 2019
Due to the diverging beam, viewing the laser output with optical instruments (for example, eye loupes, magnifiers and microscopes) within a distance of 100 mm may pose an eye hazard.

LC15Dx

Closing the gap with touch probe accuracy



NIKON CORPORATION

1-5-20, Nishioi, Shinagawa-ku, Tokyo 140-8601, Japan
Tel: +81 3 6743 5742
<https://industry.nikon.com>

NIKON METROLOGY EUROPE NV

Interleuvenlaan 86
B-3001 Leuven, Belgium
Tel: +32 16 74 01 00
Sales.Europe.NM@nikon.com

NIKON METROLOGY UK LTD.

UNITED KINGDOM Tel: +44 1332 811 349
Sales.UK.NM@nikon.com

NIKON METROLOGY SARL

FRANCE Tel: +33 1 60 86 09 76
Sales.France.NM@nikon.com

NIKON METROLOGY GMBH

GERMANY Tel: +49 211 45 44 69 51
Sales.Germany.NM@nikon.com

NIKON METROLOGY, INC.

12701 Grand River Road, Brighton,
MI 48116 U.S.A.
Tel: +1 810 220 4360
Sales.NM-US@nikon.com

NIKON METROLOGY - MÉXICO

MEXICO Tel: +52 442 688 5067
Sales.NM-MX@nikon.com

NIKON PRECISION (SHANGHAI) CO., LTD.

CHINA Tel: +86 21 6841 2050 (Shanghai branch)
CHINA Tel: +86 10 5831 2028 (Beijing branch)
CHINA Tel: +86 20 3882 0551 (Guangzhou branch)
Web.Nis@nikon.com

NIKON INSTRUMENTS KOREA CO. LTD.

KOREA Tel: +82 2 6288 1900

NIKON SINGAPORE PTE. LTD.

SINGAPORE Tel: +65 6559 3651
NSG.Industrial-sales@nikon.com

PT. NIKON INDONESIA

INDONESIA Tel: +62 213 873 5005
PTN.Instruments@nikon.com

NIKON SALES (THAILAND) CO., LTD.

THAILAND Tel: +66 2633 5100

ISO 14001 Certified

for NIKON CORPORATION

ISO 9001 Certified

for NIKON CORPORATION
Industrial Metrology Business Unit

More offices and resellers at <https://industry.nikon.com>